



anovafurnishings.com  
888.535.5005 tel

## LEVELING KIT ASSEMBLY INSTRUCTIONS

**TR35** – Receptacles with Bamboo, Recycled Plastic or Thermory® Planks

**Recycled Plastic** – TR35AT, TR35OT, TR35BT, TR35BTA, TR35DT, TR35DRT, TR35VBT, TR35VRT


**Bamboo** – TL35AT, TL35OT, TL35BT, TL35BTA, TL35DT, TL35DRT, TL35VBT, TL35VRT

**Thermory** – TT35AT, TT35OT, TT35BT, TT35BTA, TT35DT, TT35DRT, TT35VBT, TT35VRT

### TOOLS NEEDED:

- Ratchet Wrench with 7/16" Socket
- Level

### LEVELING KIT COMPONENTS:

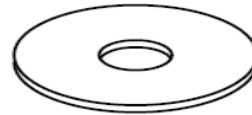


10 x

1.25" OD Flat Washer

### ASSEMBLY:

1. Inspect the contents for damage and to determine that all components and hardware are present.
2. After positioning your receptacle at the desired location, check it for level and/or for rocking.
3. If the receptacle wobbles, note which Feet lift from the surface as it rocks. Using the Level, steady the receptacle and make a note of how far each of the Feet lifts from the surface when the receptacle is level. This will help you determine how much to shim each Foot. The Washers provided for leveling are .063" thick.
4. Turn the receptacle onto its side - always work on the packaging cardboard and plastic or some soft surface to avoid scratching the receptacle.
5. Remove the Bolt and Rubber Foot that needs to be shimmed from the receptacle using the 7/16" socket wrench. Keep the Foot on the Bolt and place an appropriate number of Washers on the Bolt behind the Foot as shown.
6. Replace the Bolt, Foot, and Washers and tighten using the Socket Wrench. Turn the receptacle upright and test for wobble again.
7. Repeat Steps 4, 5, and 6 for each Foot if necessary.

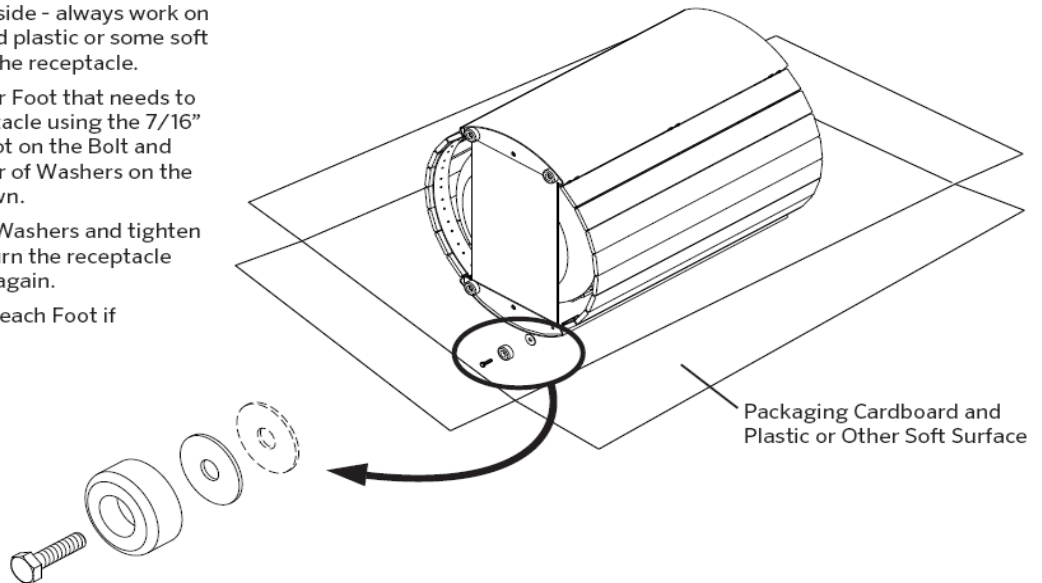

Packaging Cardboard and Plastic or Other Soft Surface



### WARNING

- Furniture must not be used other than for its intended purpose and should be inspected regularly for loose, missing, or broken hardware, and general instability.
- Furniture that is damaged or appears to be unstable must be removed from service and be repaired or replaced.
- Repairs must be made using only factory authorized parts and methods.

### CARE AND MAINTENANCE

- Do not drag the assembled unit across any surface.
- This product requires only periodic cleaning with a sponge and a solution of mild detergent and water to remove surface dirt. Do not clean with a solvent or petroleum based products.