

Assembly Instructions

Exposition Contour Benches

LEXC4 - Exposition 4' Contour Bench

LEXC5 - Exposition 5' Contour Bench

LEXC6 - Exposition 6' Contour Bench


Tools Needed

9/16" Open-end or box-end wrench or ratchet with 9/16" socket


Phillips head screwdriver




Component Parts

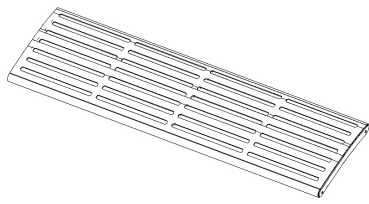

Contour Back (Qty 1)

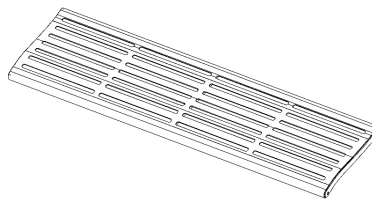


Contour Seat (Qty 1)

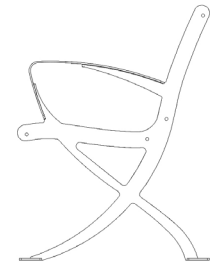

Bench Supports (Qty 2)


Assembly Hardware - All hardware is stainless steel.



(8) 3/8" x 1 1/2" Phillips
Head Screws



(8) 3/8" Nylock Nuts



(8) 3/8" Flat Washers



(4) Plastic Rectangular
Feet



(8) Adhesive Strips

Assembly Instructions

1. Inspect the shipping container contents for damaged or missing components.
2. Lay all parts on a soft work surface or on the shipping packaging to prevent damage to finish.

NOTE: Before assembly, it is recommended that a light oil or petroleum jelly be applied to any threads.

3. Locate one of the bench supports and position it near the end of the seat. Before proceeding, double-check that the seat portion is oriented correctly before assembling. The front edge of the seat has a slight downward curve to it. The mounting holes will not match up unless the bench seat is aligned to the bench supports in the proper orientation.

4. Apply two adhesive strips to one of the plastic rectangular feet. Then firmly apply the plastic rectangular foot to the metal foot of the bench support aligning the holes in each. Repeat for each of the remaining feet.

5. Align the mounting holes in the bench support with the holes on one end of the bench seat. Insert one of the 5/16" x 1 1/2" Phillips head screws through both parts, with screw head on the outside surface of the bench support. Place a 5/16" washer and 5/16" Nylock nut on the inside end of the screw and finger tighten.

Note: Installing the Phillips head screws in this direction reduces the risk of scratching during use.

6. Repeat step 5 for the other side of the seat. Again, leave the hardware finger tight.

7. Next, align the mounting holes in the bench supports with the holes in the back of the bench. With the remaining hardware, attach the back to the bench support with the Phillips head screw on the outside surface of the support. Place a 5/16" washer and 5/16" Nylock nut on the inside end of the screw and finger tighten.






8. Repeat step 7 for the other side of the back leaving the hardware finger tight.

9. After all of the screws are installed, use the 1/2" open-end wrench, 1/2" box-end wrench or ratchet with a 1/2" socket to tighten.

10. Move the bench to the location where it will be used.


Note: The feet of the bench include surface mounting holes for permanent installation.

11. After two weeks, retighten all of the hardware.

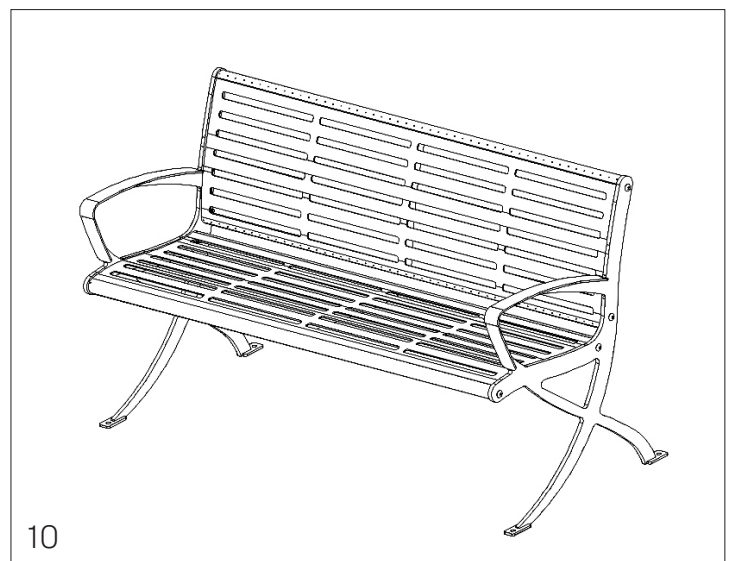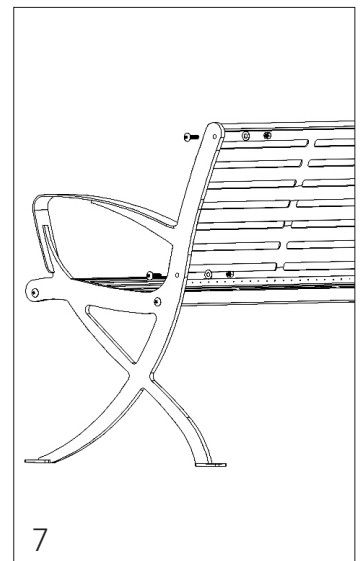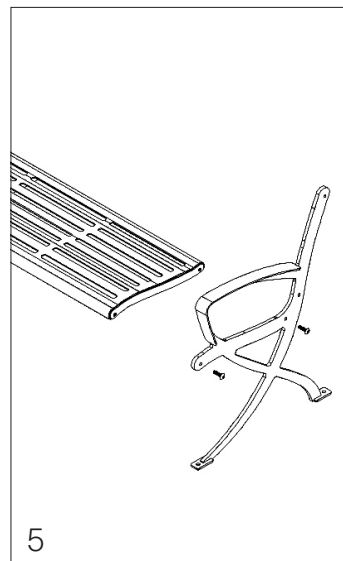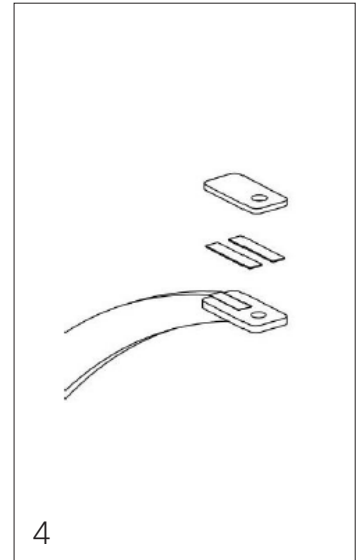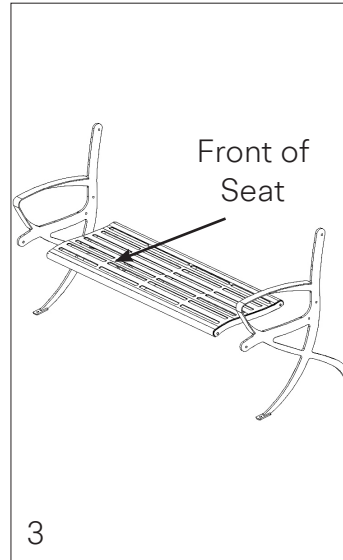

Replacement Parts

Contact us at **1-866-797-1761** to order replacement parts.

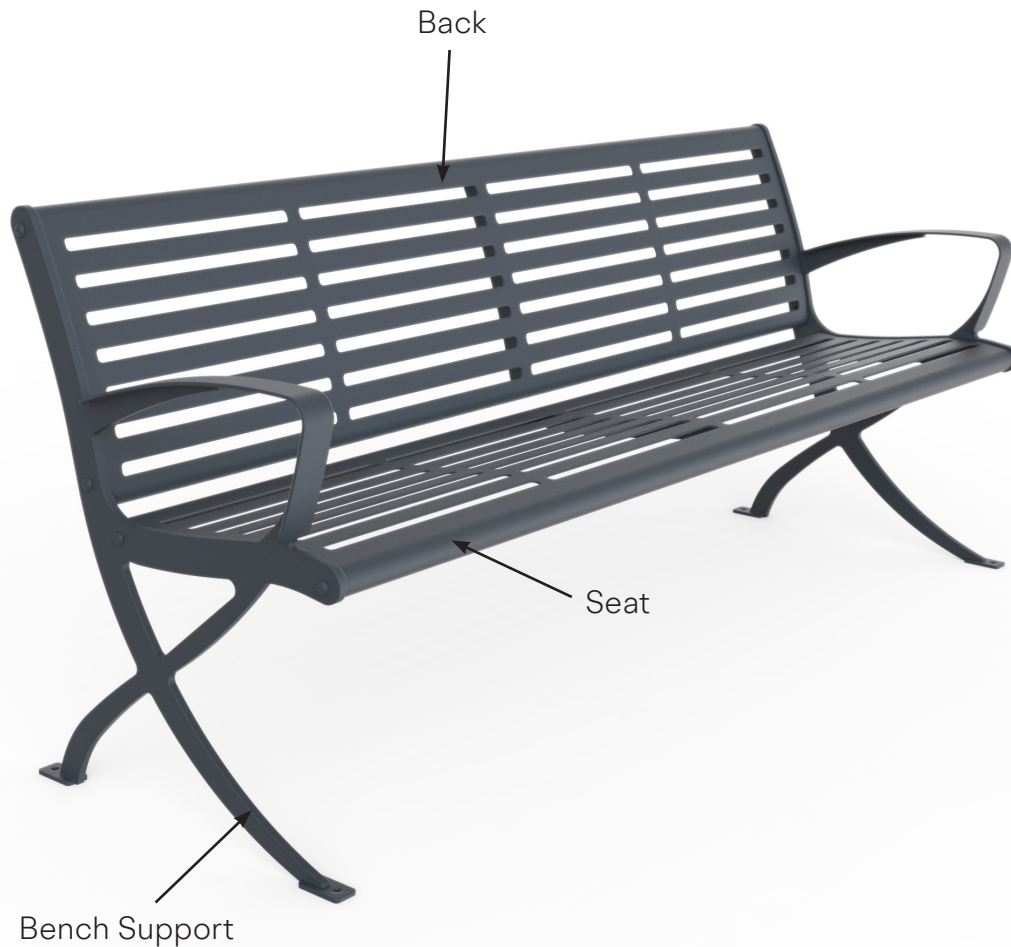

WARNING

- Furniture must not be used other than for its intended purpose and should be inspected regularly for loose, missing, or broken hardware, and general instability.
- Furniture that is damaged or appears to be unstable must be removed from service and repaired or replaced.
- Repairs must be made using only factory authorized parts and methods.

CARE AND MAINTENANCE

- Do not drag the assembled unit across any surface.
- This product requires only periodic cleaning with a sponge and a solution of mild detergent and water to remove surface dirt.
- Do not clean with a solvent or petroleum based products.

Manufactured in the U.S.